






Wars LED

Wars LED




- ▶ Stopień ochrony IP65 / IP65 protection rating
- ▶ Korpus i klosz wykonany z poliwęglanu (PC) / Body and lampshade made of PC
- ▶ Napięcie zasilania: 230 V 50 Hz lub 220 V DC / Power supply voltage: 230 V 50 Hz or 220 V DC
- ▶ Okablowanie przystosowane do świetlówek LED / Wiring adapted for LED tubes
- ▶ Montaż sufitowy lub na zwieszakach – regulowany / Ceiling installation or pendant type installation – adjustable


- ▶ Do oświetlenia hal przemysłowych, magazynów, tuneli, piwnic, garaży itp. / For illuminating industrial halls, warehouses, tunnels, basements, garages etc.
- ▶ Zakres temperatury pracy: t_a 10°C ÷ 50°C / Temperature working range: t_a 10°C ÷ 50°C

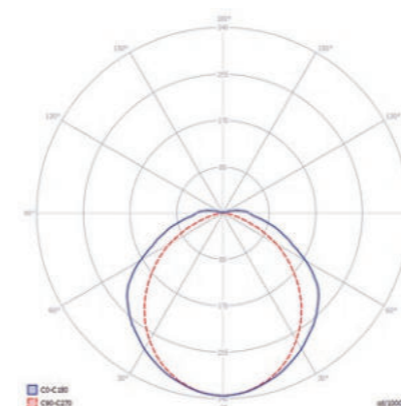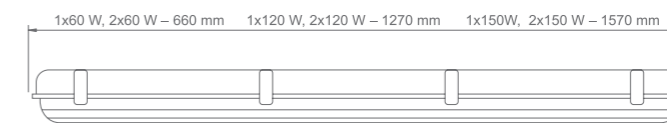

Wars 2x60 LED

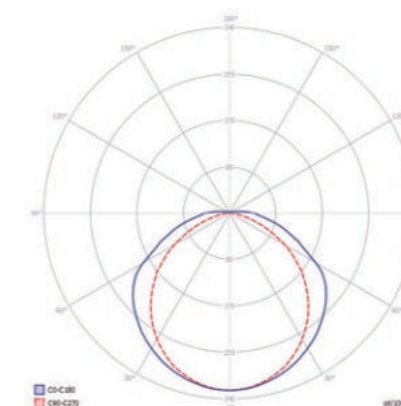

Wars 2x120 LED

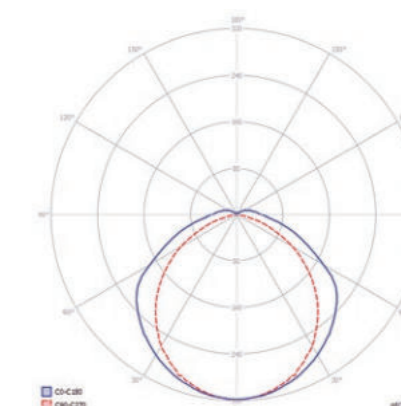

Wars 2x150 LED

MODELE STANDARDOWE* / STANDARD MODELS*

Model / Model	Numer katalogowy / Catalogue number	Wymiary (mm) / Dimensions (mm)	Waga (kg) / Weight (kg)
WARS 1x60 LED	99669	660x92x88	0,80
WARS 2x60 LED	99668	660x92x134	1,10
WARS 1x120 LED	99667	1270x92x88	1,45
WARS 2x120 LED	99666	1270x92x134	1,95
WARS 1x150 LED	99665	1570x92x88	1,80
WARS 2x150 LED	99664	1570x92x134	2,35

* Świetłówki LED zamawiane oddzielnie / LED tubes separately available